**VULCAN** 

# **VSP SERIES**

STOCK POT STOVES

C.S.I. Section 11420



□ VSP100 Single Burner Section□ VSP200 Double Burner Section

### **STANDARD FEATURES**

- Stainless steel front with painted sides.
- Heavy cast iron top with integral spider grate.
- Painted black legs adjustable from 119/16" to 131/16".

Item #

- 110,000 BTU/hr. total.
- Two 55,000 BTU/hr. cast iron burners, one centered and one surrounding.
- Each burner controlled by a heavy duty infinite gas valve.
- Large removable drip pan with 3<sup>3</sup>/<sub>4</sub> quart capacity.
- Gas pressure regulator provided for each section.
- 3/4" (19mm) rear gas connection (each section).

### **VSP100**

110,000 BTU/hr. total. 18"W x 24<sup>1</sup>/<sub>2</sub>"D x 22<sup>1</sup>/<sub>2</sub>" - 24"H.

#### **VSP200**

220,000 BTU/hr. total. 36"W x 24<sup>1</sup>/<sub>2</sub>"D x 22<sup>1</sup>/<sub>2</sub>" - 24"H.







### SPECIFICATIONS:

Heavy duty gas stock pot stove, Vulcan-Hart Model No. (VSP100) (VSP200). Stainless steel front and painted sides. Black painted legs adjustable from 119/16" to 131/16". Heavy cast iron top with integral spider grate. Each section consists of two heavy cast iron burners rated at 55,000 BTU/hr. each. Burners arranged with one in center and one surrounding for maximum flame control. Each burner controlled by a heavy duty gas infinite gas valve. 3/4" (19mm) rear gas connection and gas pressure regulator per section. Gas supply to be (Natural) (Propane).

Exterior dimensions: VSP100 - 18"W x 241/2"D x 221/2" - 24"H.

VSP200 - 36"W x 241/2"D x 221/2" - 24"H.

CSA design certified. NSF listed.

### **OPTIONS**

☐ Stainless steel sides.




## **VSP SERIES**

STOCK POT STOVES

#### **IMPORTANT**

- A pressure regulator sized for this unit is included. Natural gas 5" W.C., Propane gas 10" W.C.
- An adequate ventilation system is required for Commercial Cooking Equipment. Information may be obtained by writing to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269. When writing refer to NFPA No. 96.
- These units are manufactured for installation in accordance with ANsz223.1a (latest edition), National Fuel Gas Code. Copies may be obtained from American Gas Association, 1515 Wilson Blvd., Arlington, VA 22209.

**NOTE:** This appliance must be installed with a six inch clearance at both sides and the rear adjacent to combustible construction.

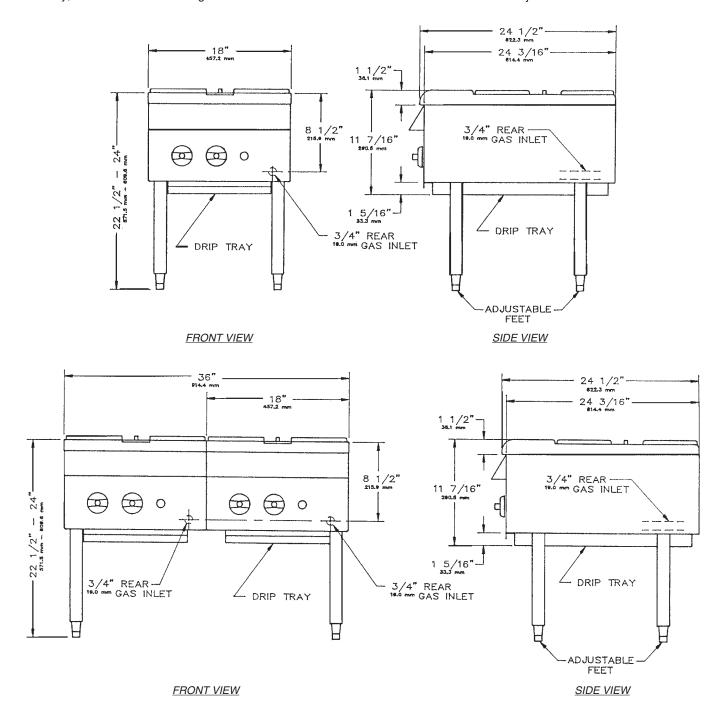

**NOTE:** In line with its policy to continually improve its products, Vulcan-Hart Company reserves the right to change materials and specifications without notice.

